


版本	更新内容	更新日期
v0.0	量产图纸	20211209
v1.0	删除认证解释条款, 尾页更新	20220118
v2.0	地址更改	20220713
v3.0	增加欧代英代、执行标准	20230131

材质:110g 双铜 四色印刷  
成品尺寸:80\*115mm

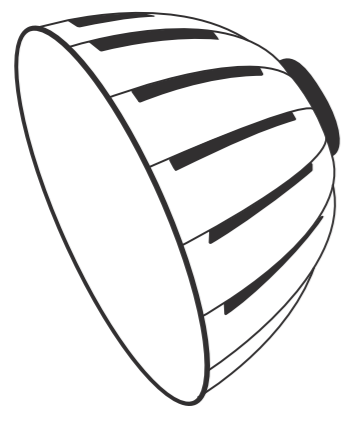

**Parabolic Softbox**  
RA-D55 / RA-D85 User Manual

**Thank you for purchasing SmallRig RA-D55 / RA-D85 Parabolic Softbox.**


SmallRig RA-D55/RA-D85 Parabolic Softbox is a versatile soft light accessory with 55cm/85cm diameter. Universal Bowens mount design, makes it compatible with SmallRig RC120D/RC120B/RC220D/RC220B and other Bowens Mount Light of other brands.

The new generation of self-developed quick-release design, the diffusion and the frame are combined into one, you can easily install and disassemble the dome in 15 seconds, simplify the use process, bring you the best user experience.

RA-D55/RA-D85 also includes a high-quality fabric grid to help focus in your light beam angle to 45 degrees, which will allow you to maximize control of your lighting.


Using industrial-grade soft material and highly reflective coating. With two diffusions for a stronger soft effect or higher light transmission to satisfy your different needs.

**In the Box**

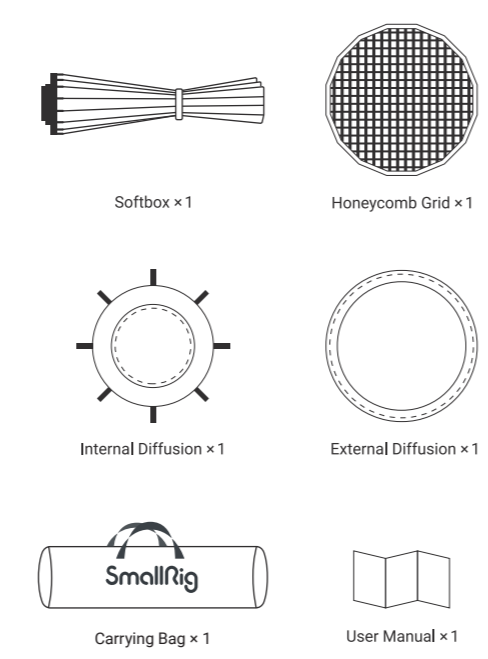

Softbox × 1  
Honeycomb Grid × 1  
Internal Diffusion × 1  
External Diffusion × 1  
Carrying Bag × 1  
User Manual × 1

**Install / unlock**



1. Method 1: Put the softbox on the flat ground and press it open with both hands.  
2. Method 2: Press the chassis diagonally and pull it up respectively, and make it enter the fixed clamping position with a "click" sound.  
3. Paste the internal diffusion onto the black Velcro tape on the edge of the softbox.  
4. Paste the external diffusion onto the black Velcro tape on the edge of the softbox.  
5. Paste the honeycomb grid onto the black Velcro tape on the edge of the softbox.  
6. Disassembly: gently lift the skeleton, press it to complete disassembly.

**Specifications**

Product Name	RA-D55 Parabolic Softbox
Opening Softbox Size	Φ550 × 370mm (21.6 × 14.6")
External Diffusion Size	Φ530mm (20.9")
Internal Diffusion Size	Φ400mm (15.7")
Honeycomb Grid Size	Φ540mm (21.3")
Product Weight	1120g / 2.47lbs

Product Name	RA-D85 Parabolic Softbox
Opening Softbox Size	Φ840 × 570mm (33.1 × 22.4")
External Diffusion Size	Φ830mm (32.7")
Internal Diffusion Size	Φ645mm (25.4")
Honeycomb Grid Size	Φ830mm (32.7")
Product Weight	1494g / 3.29lbs

If any change in technology parameters, shall take real product as criterion. No inform will be made.

**Warranty**

**Please keep your original receipt and guarantee card. Be sure the dealer has written on it the date of purchase and SN of the product. These are required for warranty service.**

**After-sale warranty terms**

- 7 Days DOA Return Policy: Within 7 days from the date of the package receipt, return or replacement can be done if the item received is malfunctioning or physical damaged (not caused by human abused), return shipping cost will be on SmallRig's charge.
- 1-Year Warranty: Within 1-year from the date of the package receipt, defective product which is not caused by human abused is eligible to get repair / replacement for free; defective product which is caused by human abused, repair / replacement will be charged based on the damage level.

**This warranty does not cover:**


- Defect caused by users' violation of the "Instructions" and "Usage Steps".
- The product identification or SN label is removed or defaced in any way.
- The product is serviced or repaired by any one other than our company or the service agency authorized by our company.

EC REP Kingstar Technology GmbH  
Ruckel-Ostert-Strasse 5, 65760 Eschborn, Deutschland  
eur@kingstar.de

UK AR UK CROSSBORDER LIMITED  
7 Bell Yard, London WC2A 2LR, UK United Kingdom  
uk-crossborder@outlook.com

**www.smallrig.com**

Manufacturer: Shenzhen Leqi Network Technology Co., Ltd.  
Add: Rooms 103, 501 and 601, Building 5,  
Fenghe Industrial Park, Nos. 1301-50 Guangguang Road,  
Longhua District, Shenzhen, Guangdong, China.

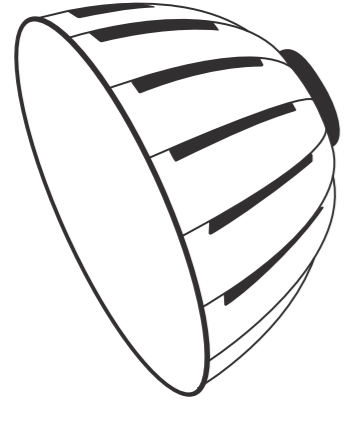

**抛物线柔光箱**  
RA-D55 / RA-D85 用户手册

**感谢您购买 SmallRig RA-D55 / RA-D85 抛物线柔光箱。**

SmallRig RA-D55 / RA-D85 抛物线柔光箱是一款直径为 55cm/85cm 的多用途的柔光附件。


接口形式为通用的保莱口设计,除了兼容 SmallRig RC120D / RC120B / RC220D / RC220B 外,同时还兼容市面上其他品牌保莱卡口的点光源。

自主研发最新一代快拆结构,15 秒钟即可完成拆卸,简化使用流程,带给您最好的用户体验。

标配 45° 格栅,有效约束光线范围,适用更多场景。


采用工业级柔光材料和高反光涂层,并标配两块柔光布,获得更强的柔光效果或者更高的光通过性,满足您的不同需求。

**包装物品清单:**

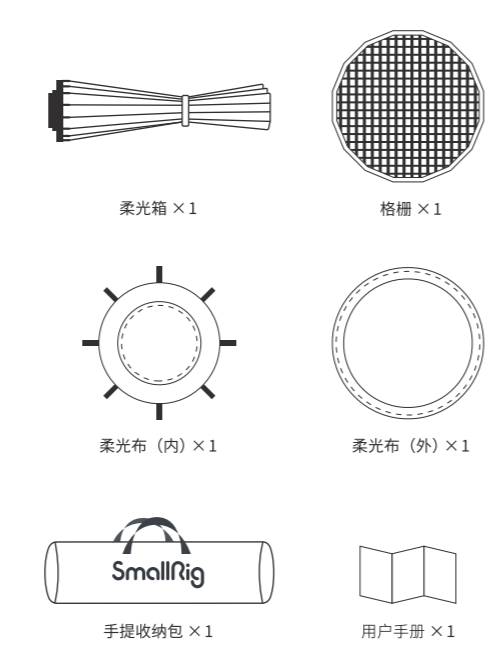

柔光箱 × 1  
格栅 × 1  
柔光布 (内) × 1  
柔光布 (外) × 1  
手提收纳包 × 1  
用户手册 × 1

**安装 / 拆卸**



1. 方式一:将柔光箱放在平地上用双手按压弹开。  
2. 方式二:将柔光箱主体垂直立起来,对角按在固定卡位上,听到“咔”声便落入固定卡位。  
3. 依次将内柔光布粘贴到柔光箱上的魔术贴胶上。  
4. 依次将外柔光布粘贴到柔光箱内侧边缘的魔术贴胶上。  
5. 依次将格栅粘贴到柔光箱外边缘黑色魔术贴胶上。  
6. 拆卸:手肘中夹住微旋钮,按住按钮,依次即可完成拆卸。

**参数规格**

产品名称	RA-D55 抛物线柔光箱
柔光箱展开尺寸	Φ550 × 370mm (21.6 × 14.6")
柔光布尺寸 (外)	Φ530mm (20.9")
柔光布尺寸 (内)	Φ400mm (15.7")
格栅尺寸	Φ540mm (21.3")
产品净重	1120g / 2.47lbs

产品名称	RA-D85 抛物线柔光箱
柔光箱展开尺寸	Φ840 × 570mm (33.1 × 22.4")
柔光布尺寸 (外)	Φ830mm (32.7")
柔光布尺寸 (内)	Φ645mm (25.4")
格栅尺寸	Φ830mm (32.7")
产品净重	1494g / 3.29lbs

技术参数如有改动,以实物为准,恕不另行通知。

**保修条款**

请保留您的原始购买单据及保修卡,同时包含您的购买日期、产品序列号等,这些资料质保服务时均需要提供。

**售后质保条款**

- 七天无理由包退/换:自签收之日起7日内,用户可以选择退货/退货。
- “一年质保”:自签收之日起一年内,出现人为产品故障,用户可以获得免费维修/换货;出现人为损坏,需要付费进行维修/换货。

**质保无效说明:**

- 当用户违反本说明书中“注意事项”“操作说明”任何一条导致的质量失效,不在质保范围。
- 产品序列号标识已经被篡改或无法辨识,不在质保范围。
- 产品未经本公司或者指定授权维修公司检修及改装的,不在质保范围。

**保修卡**

产品编号	
产品名称	
购买日期	
用户姓名	
用户电话	
用户地址	
购买单据	

中国制造

**www.smallrig.com**

执行标准: GB/T 26572-2011

制造商: 深圳市乐其网络科技有限公司

地址: 中国广东省深圳市龙华区观澜街道新社区观光路  
1301-50号丰和工业园厂房 5 栋 103.501.601

技术要求 (包装物料)	Small 深圳市乐其网络科技有限公司	单位	mm	MODEL (成品号)	3585 3586	包装设计	认证工程师	ID设计师	产品经理
1.材料: 所有材料要求符合RoHS 2.0环保要求 2.珍珠棉类及含有胶水材料需满足质量验收要求: 低温存储 -20°C±2°C 24h 高温高湿 70±2°C 90%±5% 24h 不溢胶,不自然分层,测试后产品无残胶 3.工艺: 模切整齐,无划痕; 覆膜无尘,无气泡; 烫印工整 4.印刷: 印刷清晰,无污点,无脏污 5.公差: 彩盒±1mm; 物流箱±10mm 6.外观: 外观要求参考承认书,提供《样品承认书》	纸张厚度标准: • 铜版纸类印刷品: 纸张克重依据印刷行业行业标准 • 坑纹纸类印刷品: 破裂强度及边压强度依据印刷行业行业标准	页码	1/1	PART_NO. (物料编号)	\	包装复核	质量工程师	结构设计师	产品线总监
			公差 ±1	PART_NAME (零件名称)	用户手册	文案审核	Vi 审核	项目经理	研发综合部